

A

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)*(Only for new nonprovisional applications under 37 CFR 1.53(b))*Docket No.
BMID9813USTotal Pages in this Submission
94**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

LANCET DISPENSER

and invented by:

Hans-Juergen KUHR and Hans KINTZIGJCS16 U.S. PTO
09/389428
09/03/99If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☐ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 40 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications *(if applicable)*
 - c. ☐ Statement Regarding Federally-sponsored Research/Development *(if applicable)*
 - d. ☐ Reference to Microfiche Appendix *(if applicable)*
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings *(if drawings filed)*
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BMID9813US

Total Pages in this Submission
94

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 6
4. ☒ Oath or Declaration
- a. ☐ Newly executed *(original or copy)* ☒ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment *(to follow)*
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EL137589530US

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
BMID9813US

Total Pages in this Submission
94

Accompanying Application Parts (Continued)

15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☒ Additional Enclosures (please identify below):

General Appointment of Representative for U.S. Patent and Patent Application (1pp).

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims		- 20 =	0	x \$18.00	\$0.00
Indep. Claims		- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$0.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$0.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☐ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
 - ☐ Credit any overpayment.
 - ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).


Signature

Richard T. Knauer, Reg. No. 35,575
Roche Diagnostics Corporation
9115 Hague Road, Bldg. D
P.O. Box 50457
Indianapolis, IN 46250-0457
Telephone: (317) 576-7464

Dated: September 3, 1999

cc:

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner for Patents
Washington, DC 20231


GENERAL APPOINTMENT OF REPRESENTATIVE FOR
U.S. PATENT AND PATENT APPLICATION

The undersigned applicant or assignee hereby appoints D. Michael Young, Reg. No. 33,819, Richard T. Knauer, Reg. No. 35,575, Brent A. Harris, Reg. No. 39,215 and Marilyn L. Amick, Reg. No. 30,444 all of Roche Diagnostics Corporation, 9115 Hague Road, P.O. Box 50528, Indianapolis, Indiana 46250, Telephone (317) 845-2000:

to prosecute and transact all business on its behalf before the United States Patent and Trademark Office in connection with any U.S. patent assigned to it and any U.S. patent application filed by it or on its behalf and to receive payments on its behalf.

Signed this 18. day of February, 1999 at Mannheim, Germany.

Roche Diagnostics GmbH

ppc.


Signature


Dr. Bernd Kolb

Print Name

Vice President

Position or Title

Roche Diagnostics GmbH

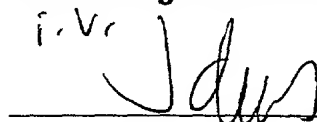i.v.


Signature

Dr. Helmut Schroth

Print Name

Director

Position or Title

Lancet dispenser

The invention concerns a system which is suitable for obtaining a body fluid, in particular blood, from a body region of a person to be examined, wherein the system contains a lancing device, two or several lancets and a lancet magazine for storing two or several lancets. The invention additionally concerns a lancing device, lancets and a lancet magazine which are suitable for use in a system according to the invention and it concerns a special method for removing a lancet from a lancet magazine.

The examination of blood samples in clinical diagnostics enables an early and reliable detection of pathological states and the specific and well-founded monitoring of body states. Medical blood diagnostics always requires the collection of a blood sample from an individual to be examined. Whereas several millilitres of blood are collected from a person to be examined by venipuncture for analysis in hospitals and by physicians in private practice in order to carry out many laboratory tests, nowadays only a few microlitres of blood are often sufficient for individual analyses which are specifically for one parameter. Such small amounts of blood do not require venipuncture. On the contrary it is sufficient to obtain blood by pushing a sterile, sharp lancet through the skin e.g. into the finger pad or earlobe of the person to be examined in order to collect a few microlitres of blood for the analysis. This method is particularly suitable when it is possible to carry

660600 8246660

out the analysis of the blood sample immediately after the blood collection.

Lancets and corresponding instruments (so-called blood withdrawal instruments, blood lancet devices or - as they are referred to in the following - lancing devices) which enable a substantially pain-free and reproducible blood collection are available especially in the so-called home-monitoring field i.e. where medical laymen themselves carry out simple analyses of the blood especially for the regular blood collection by diabetics which has to be carried out several times daily to monitor the blood glucose concentration. Furthermore the use of lancets with lancing devices which lower the psychological threshold when lancing one's own body is of particular importance for children affected by diabetes who depend on regular blood glucose tests. Examples of lancets and lancing devices are the commercially available instruments and lancets Glucolet® from the Bayer AG Company and Softclix® from the Boehringer Mannheim GmbH. Such lancets and instruments are for example the subject matter of EP-A 0 565 970, US 4,442,836 or US 5,554,166.

In the systems that are available at present the lancets for use in lancing devices are usually provided in a loose form. For each lancing process the user manually removes a lancet from a pack, for example a cardboard box or a tube loosely filled with a plurality of lancets in a disordered arrangement. Subsequently the lancing device is prepared for holding the lancet for example by unscrewing or pulling off a protecting cap whereby the lancet holder of the lancing device is exposed. The lancet holder serves on the one hand to hold the lancets, on the other hand it guides the lancet in the

actual lancing process. The lancet removed from the pack is manually inserted into the lancet holder of the lancing device and immobilized there. Then the protective cover which surrounds the lancet tip and protects this and the user, must be manually removed from the lancet. Subsequently the lancing device is sealed again with its protecting cap. The protecting cap ensures that the lancet is no longer accessible from outside. It usually has an opening through which the lancet tip can pass during the actual lancing process. Finally the lancing device is tensioned and is available for the lancing process for drawing blood.

The many manual operating steps are felt to be disadvantageous by the user and are particularly problematic when perception is limited in a hypoglycaemic state. Moreover the user will be encouraged to use a once inserted lancet several times for lancing and drawing blood. This is unacceptable for hygienic reasons and the repeated use of lancets also leads to increasing pain for the user since the lancets are designed as disposable articles and rapidly become blunt. Furthermore with the lancing devices and lancets of the prior art there is a risk that lancing devices will be used with lancets that do not fit or that the lancets will be inserted improperly into the lancing devices. Furthermore a user can be accidentally injured when the lancets and lancing devices are used improperly.

There have therefore been no lack of attempts to eliminate the said disadvantages. Lancing devices are known from the US patent documents US 3,030,959, US 4,794,926, US 5,035,704 and US 5,152,775 in which several lancets are stored and which can use these

individually and in succession for lancing processes. Lancets that are linked together are known from US 5,514,152 and WO 98/14125 which lancets can be inserted together in a type of lancing device. However, the designs proposed in these documents can only partially solve the said problems and themselves cause some new disadvantages such as a complicated construction of the lancing device and/or lancets, lack of hygiene and/or sterility and inadequate user convenience.

The object of the invention is to eliminate the disadvantages of the prior art. In particular it is an object of the present invention to reduce the number of manual operating steps required to insert a lancet into a lancing device and thus to increase the operating convenience for the user. Furthermore an object of the invention is to ensure that the lancet can be inserted in the lancing device without mistakes and to increase the safety for the user when using the lancing device and lancet especially in hypoglycaemic states.

The object is achieved by the subject matter of the invention as characterized in the patent claims.

The invention concerns a system that is suitable for collecting a body fluid, in particular blood from a body region of a person to be examined containing a lancing device which is suitable for holding a lancet, a lancet magazine for storing two or several lancets which has a transport device for the lancets and an opening into which the lancing device can be inserted to remove a lancet from the lancet magazine, and two or several lancets.

09380428-000300

The system according to the invention is suitable for collecting a body fluid, in particular blood from a person to be examined. In this process the lancet that is held, guided and driven by the lancing device pierces the skin of this person to a defined puncture depth and thus forms a tiny wound. A drop of the body fluid, in particular blood of usually a few microlitres up to a maximum of 100 microlitres volume collects on the surface of the wound. The body fluid is preferably used immediately after the collection for a diagnostic examination. However, the body fluid sample can also be used for a later examination.

In particular the system according to the invention can be used to collect capillary blood from a body region such as e.g. a finger pad or an earlobe. The system can be used by the person to be examined himself, for example a diabetic who wishes to determine his blood glucose content and also by a third person e.g. a doctor or a nurse to collect blood samples from a patient.

The system according to the invention contains a lancing device, lancets and a lancet magazine whose form and function are matched to one another to achieve an optimal interaction between the individual system components. The individual components and their interaction is elucidated in more detail in the following.

Lancet magazine

The central component of the system according to the invention is a lancet magazine. It serves to hold, store and provide the lancets and makes the functional

connection between the lancets and lancing device. In order to fulfil these purposes the lancet magazine has

- a housing in which the lancets are stored,
- a removal position for a lancet and optionally means which hold a lancet in the removal position,
- a device which enables manual or automatic transport of the lancets into the removal position,
- an opening into which the tip of the lancing device can be inserted in order to remove a lancet and which optionally contains means for guiding the lancing device,
- optionally an additional opening which is opposite to the opening for the lancing device which allows the protective sheath of the lancet needles can be removed after they have been withdrawn by the lancing device from the inside of the lancet magazine and
- optionally a closable opening through which the lancets magazine can be filled with lancets.

The lancet magazine is preferably not primarily used to maintain the sterility of the lancets. This is preferably achieved by suitable constructional measures on the lancet itself, for example by sealing the lancet tip in a removable, tight plastic protective sheath.

The housing of the lancet magazine is manufactured from a metal for example aluminium or a plastic e.g. polypropylene or polyethylene. The housing is preferably manufactured by injection moulding from injection-mouldable material, in particular plastic. The housing can in principle have any shape that is suitable for the function of the lancet magazine. It has turned out to be preferable for the lancet magazine to either have the shape of an elongate, flat cuboid i.e. similar to a packet of cigarettes, or the shape of a flat quadratic,

polygonal or round disk e.g. like a powder tin. Of course the edges and corners of the housing can be rounded for design or ergonomy purposes. The dimensions of the lancet magazine are essentially determined by the size of the lancets and the number of the lancets that are to be stored. According to the invention at least two lancets can be stored in the magazine. The lancet magazine preferably serves to store 10 to 200 lancets. It particularly preferably contains 20 to 50 lancets.

In a preferred embodiment the lancet magazine has a flat, elongate cuboid shape. The length and width of the short, narrow surfaces correspond to the dimensions of a single lancet; the width of the long, narrow surfaces correspond to the width of the lancet and their length corresponds to at least the sum of the heights of the lancets that are to be accommodated in the magazine. This accordingly results in the dimensions of the large cuboid surfaces. In this preferred embodiment the lancets are stacked pair-wise in the magazine either in contact next to or above one another or opposite to one another e.g. head to head and can be present individually and also connected detachably to one another to form a set of lancets for example by glueing or welding the individual lancets at their points of contact i.e. similar to the manner in which staples adjoin one another to form a set or they are connected by thin plastic cross-pieces.

In an alternative equally preferred embodiment, the lancet magazine has a flat quadratic, regular or irregular, polygonal or round disk shape. In this embodiment the lancets are preferably arranged radially in a plane around a central axis where the lancet tips are particularly preferably inserted into a common

663050-2246250

central plastic disk and the lancets are thus linked together to form a lancet disk. Furthermore the lancet tips are kept sterile in this manner.

Independent of the external shape of the lancet magazine - whether cuboid or disk shaped - the lancet magazine according to the invention has a removal site or removal position for a lancet. A lancet is moved into this position with the aid of a transport device located in the magazine in order to be removed by the lancing device. After a lancet has been removed from the magazine, the transport device serves to transport the next i.e. the lancet in the magazine which was originally adjacent to the lancet that has been removed, to the removal position of the magazine. This transport of the next lancet to the removal position can be carried out automatically by the transport device so that there is always a lancet in the removal position provided the magazine contains lancets, or the transport of the next lancet is not automatically triggered by the removal of a lancet but rather manually by the user. The transport mechanism can be coupled to a counting device which shows the user how many lancets from the magazine have already been used or how many lancets are still stored in the magazine.

In a preferred embodiment the transport device can move up all remaining lancets in the magazine. However, in another embodiment it was also possible to only transport one lancet to the removal position and preferably the next in position.

In a preferred embodiment the lancets are manually brought into the removal position with the aid of a

slide that is operated from outside. The slide can be moved continuously towards the removal position or in discrete steps, for example with stops, using for example an operating knob and thus transport the lancets contained in the magazine. In this connection a side surface of the lancets preferably lies wholly or partially on the part of the slide that is located in the magazine.

In a further preferred embodiment the lancets are moved into the removal position with the aid of an automatic feed system, for example by means of a linearly movable plate driven by spiral springs in the case of the cuboid magazine or by means of a coiled spring which acts on the lancets in such a way that they make a guided, planar circular movement in the case of the disk-shaped magazine. The automatic feed system can also be driven by a motor.

In the case of an automatic feed system the transport movement of the lancets in the magazine can be triggered manually for example by operating a switch. However, the transport movement can also be started automatically by the removal of a lancet from the magazine.

Stops as well as guide grooves and guide pins or guide flanges may be present in the inner magazine walls as well as on the lancets which ensure a precise positioning of the lancets especially during transport of the lancets into the removal position.

In an additional particularly preferred embodiment of the lancet magazine according to the invention, the lancets are brought into a preliminary removal position

092050" 82468260

with the aid of a first transport device from which they are moved into the final removal position with the aid of a second transport mechanism. The first transport device can be a manually operated slide as well as an automatic feed system. In this particularly preferred embodiment the second transport device is a movable part of the lancet magazine, for example a linearly movable part of the housing supported on one or several springs. Pressure on this part of the housing moves it towards a lancet located in the preliminary removal position whereby this lancet is gripped with a gripping system for example by means of a barbed system which is optionally mounted on flexible tongues or by means of magnets. When the movable part of the magazine glides back, the lancet is transported into the final removal position and held there by the gripping system until the lancet is removed from the magazine with the aid of a lancing device.

A preferably sealable opening in the magazine is located in the area of the removal position into which at least the tip of the lancing device can be inserted in order to remove a single lancet from the inside of the lancet magazine. The geometry and size of the opening depend on the corresponding dimensions of the lancing device. The lancing device and opening preferably fit like a lock and key to ensure an unequivocal and precise alignment of these two system components during the removal process. In order to facilitate the insertion of the lancing device into the opening, the opening can have a conical or funnel shape so that it is larger towards the outside than is necessary to receive the tip of the lancing device. It is also possible that the tip region of the lancing device which is inserted into the lancet magazine is tapered to facilitate the insertion.

In a preferred embodiment a guide pin is provided in the interior of the magazine opening which engages in a corresponding guide groove in the tip of the lancing device. Of course the pin can also be located on the lancing device in which case the guide groove is then in the opening of the magazine.

When the lancing device is inserted into the magazine or removed from the magazine i.e. when movements are made which can be regarded as essentially linear and parallel to the longitudinal axis of the lancing device, the guide pin and guide groove particularly preferably serve to automatically and mechanically at least partially rotate the lancing device around its longitudinal axis. The lancet is rotated around its longitudinal axis by this rotary motion of the lancing device or a part of the lancing device which twists off the protective sheath on the lancet tip which in this case is stored in the magazine such that it cannot rotate. Hence the lancet is removed from the magazine without its protective sheath which remains at first in the magazine and can optionally be removed e.g. ejected from the magazine via an additional opening that is preferably opposite to the opening for the insertion of the lancing device.

The lancet magazine can be designed as a single use magazine (disposable magazine), or it can have means which allow the magazine to be filled with lancets. For example part of the housing of the lancet magazine can be movable and thus serve as a door or lid through which the magazine can be filled with lancets. It is also possible that part of the magazine is designed as a drawer into which lancets can be placed and inserted into the magazine.

In a preferred embodiment the lancet magazine has means which allow the actual contents of lancets to be seen from outside. For example the housing of the lancet magazine can be completely or partially transparent. It is also possible to determine the filling level by means of the relative position of a slide which may be optionally present for example by having stops in the slide position and simultaneously a scale of the degree of filling.

Lancets

Lancets that are suitable for the system according to the invention are in principle described in the prior art for example in EP-A 0 565 970. Commercially available lancets such as the Softclix[®] II lancet from the Boehringer Mannheim GmbH are also suitable for preferred embodiments of the system according to the invention.

Preferred lancets according to the invention have a needle made of metal, ceramics or plastic, one end (the tip) of which is pointed for example by a grinding process. In a preferred embodiment the rear part of the lancet needle facing away from this tip is usually wholly or partially enclosed in a lancet body made of plastic. It is usually manufactured by positioning the lancet needle in a plastic injection mould and injecting on the lancet body. In this process a protective sheath made of plastic can also be injection moulded at the same time over the tip of the lancet. The protective sheath can be present detached from the lancet body. It is, however, also possible that the protective sheath and lancet body form a unit in which case a

predetermined breaking point is provided between the protective sheath and the lancet body so that the protective sheath can be cleanly removed from the lancet.

However, lancets are also suitable according to the invention which do not have a sheath for the lancet needle. For simplicity the term "lancet" is used in the following for all variants i.e. lancet needles with and without a lancet body.

The preferred lancet for the system according to the invention contains a metal needle with a sharp point which in the process of pricking the person to be examined pierces his skin to obtain blood. The metal needle is preferably held by a lancet body i.e. a plastic or metal body which facilitates the handling of the needle.

Suitable lancets for the system according to the invention preferably contain a metal needle which is at least partially encased in a plastic body in which the plastic body preferably contains means which enable the lancet to be gripped and held by a lancing device. For example the plastic body can have a pair of opposed V-shaped recesses, circular notches or funnel-shaped indentations into which the complementary shaped barbs or elastic tongues of the lancet holder of the lancing device engage and can thus grip the lancet. Of course there may also be projections on the lancet body which can engage in corresponding recesses in the lancet holder of the lancing device.

In a preferred embodiment there are additional means present on the plastic body which prevent the lancet from being displaced or even pushed out of the lancet magazine by the lancing device during the gripping process. For example the lancet body can be provided with pins or ribs which engage in corresponding guide grooves in the lancet magazine and thus is held in its relative position to the inserted lancing device during the gripping process. Of course it is also possible that the lancet body has the groove(s) and the magazine has one or several corresponding ribs which engage in the groove(s).

In the magazine the lancet tip is preferably protected by a protective sheath for example a plastic sheath. The protective sheath serves on the one hand to protect the lancet tip from external damaging effects such as e.g. bending or contamination, which would mean a loss of the sterility of the lancet tip and, on the other hand, to protect the user from being accidentally pricked by the lancet for example when the magazine is filled with lancets. The protective sheath can be connected to the plastic body of the lancet or can be separate from this, the connected variant being preferred. The protective sheath can be a solid plastic which completely and contiguously surrounds the lancet tip or can be in the form of a hollow body moulded around the lancet tip. Each lancet can have an individual protective sheath like those that have previously been commonly used for lancets of the prior art. It is, however, also possible in a preferred embodiment that the tips of several lancet tips or all lancets present in the lancet magazine are inserted into a common plastic body, in particular a common central plastic disk which serves as a protective sheath for the lancet tips.

For the particularly preferred variant of the lancet magazine according to the invention in which the lancets can be refilled in the magazine, it has proven to be advantageous when the individual lancets are present linked together to form a set of lancets. Such a set of lancets particularly preferably contains two or several lancets which are loosely connected together for example in the region of their tips or lancet bodies. This can on the one hand be achieved by the method described above i.e. several lancet tips or the tips of all lancets present in the magazine are inserted in a common, preferably centrally disposed, plastic body, but on the other hand it can also be achieved by detachably connecting the plastic bodies or protective sheaths of individual lancets e.g. by glueing. The connection can be made by adhesive tapes as is for example common for electronic components or directly as is for example known for staples. Furthermore it is also possible to connect the lancet bodies together by plastic cross-pieces or to detachably link the lancets together via a common holder which is for example in the form of a rail or a link chain.

Lancing device

Numerous types of lancing devices are known from the prior art for example from EP-A 0 565 970 and are commercially available e.g. under the name Softclix®II from Boehringer Mannheim GmbH. With reference to the prior art and in particular to EP-A 0 565 970, it is therefore unnecessary to elucidate in more detail the general features and function of such lancing devices or blood lancet devices as they are also known.

Elongate cylindrical lancing devices are preferred according to the invention i.e. those which essentially have the shape of a fountain-pen. These lancing devices have in their interior a mechanism which guides the lancet in the lancing process towards and, after the lancing, away from the desired lancing site in the skin of the person to be examined. Usually this mechanism is driven by a tensioned spring which is manually tensioned which is why suitable tensioning devices must be present for this embodiment. A triggering button can be present on the outside of the lancing device to trigger the mechanism.

Lancing devices in a fountain-pen shape have a grip body which enables the lancing device to be handled comfortably and usually most of the mechanism described above is accommodated in its interior. Furthermore the operating knobs to trigger the thrust mechanism and optionally to eject used lancets from the lancing device are often present in the region of the grip body.

The lancet holder is preferably located at one end of the lancing device which is referred to as the tip of the lancing device. This can be concealed below a removable protecting cap. For the invention it is important that the lancet holder of the lancing device contains means which enable a lancet to be gripped and which are thus suitable for removing a lancet from the lancet magazine. For this purpose the lancet holder can be inserted into the lancet magazine through its opening in order to remove a lancet. The lancet holder is thus the tip of the lancing device which is inserted into the lancet magazine in order to withdraw a lancet. Its exact form results, on the one hand, from the shape of the lancets which are held in it and which should be gripped

by it and, on the other hand, on the opening of the lancet magazine into which it is inserted. The lancet holder of the lancing device preferably corresponds to that which is known from EP-A 0 565 970.

For the system according to the invention composed of lancing device, lancet magazine and lancets it has proven to be advantageous that the part of the lancing device which is inserted into the lancet magazine to remove a lancet has a guide groove or a guide pin which can interact with a corresponding device in the opening of the lancet magazine. This ensures that the lancing device and magazine can be joined without mistakes. Furthermore, as described above an appropriate shape of the groove - whether it is in the lancing device or in the opening of the magazine - can force a rotation of the lancing device around its longitudinal axis so that it rotates when it is inserted into the magazine or when it is removed from the magazine. In this process the lancet in the lancet holder is also rotated around its longitudinal axis and thus the protective sheath around the lancet tip is twisted off. This ensures that the lancet is present in the lancing device without a protective sheath. In this manner it is not necessary to manually twist off the protective sheath and the risk of injury to the user is reduced. Moreover the number of movements that are necessary to place a lancet in the lancing device is minimized and thus the entire procedure is simplified for the user.

A further subject matter of the invention is a lancet magazine for storing two or several lancets which is suitable for use in the system according to the invention. Such a lancet magazine has already been

described above in connection with the system according to the invention.

An additional subject matter of the invention is a lancet containing a metal needle that is partially encased in a plastic body which is suitable for use in the system according to the invention. Such a lancet has already been described above in connection with the system according to the invention.

Moreover the invention concerns a lancing device which is suitable for use in the system according to the invention. Such a lancing device has already been described above in connection with the system according to the invention.

Finally a further subject matter of the invention is a process for removing a lancet from a lancet magazine in which a lancet located in the lancet magazine is manually or automatically transported into a removal position in the interior of the lancet magazine and a lancing device is partially inserted into an opening provided for it in the lancet magazine. When the lancing device is partially inserted, it automatically grips the lancet that is in the removal position. Finally the lancing device with the gripped lancet is removed from the lancet magazine.

Preferably either during insertion of the lancing device into the lancet magazine i.e. when the lancet is gripped by the lancing device or when the lancing device is removed from the lancet magazine, the lancing device and thus also the lancet is rotated so that the protective sheath made of plastic which protects the needle tip of

The advantages of the invention can be summarized as follows:

- ◆ The system according to the invention composed of lancet magazine, lancets and lancing device simplifies lancet replacement for the user, reduces the time required and thus increases his readiness not to use lancets that have already been used once. This minimizes the risk of infection and helps to reduce pain during blood collection. Furthermore it facilitates the handling of the system in hypoglycaemic states.
- ◆ Since the user no longer has to separately hold the lancets in his hand, the lancets can be made considerably smaller than the previously common lancets which reduces the amount of material required for their manufacture. In addition disposal of the lancets creates less waste. Finally the whole system can be kept more compact so that it is easier for the user to take with him.
- ◆ The lancets in the lancet magazine are offered to the lancing device in a well-defined orientation thus excluding an insertion in an incorrect orientation.

- ♦ The lock-key principle of the lancet magazine and lancing device rules out the use of unsuitable lancets for the lancing device.
- ♦ The lancet magazine as a reusable system component can be filled with new lancets either by the manufacturer, the distributor or the consumer. The lancets themselves can be put on the market with a minimum of packaging in a space-saving and waste-saving manner.

The invention is further elucidated by the following figures.

Figure 1 shows schematically a side-view of a preferred embodiment of a lancet magazine according to the invention in which a side wall has been removed to enable a view of the interior of the magazine and the lancets contained therein.

Figure 2 shows schematically a top-view of a preferred embodiment of a lancet which can be accommodated in a lancet magazine according to figure 1.

Figure 3 shows schematically how lancets can be removed from the lancet magazine according to figure 1 using a lancing device on the basis of seven partial figures (A to G).

Figure 4 shows schematically a side-view of a further preferred embodiment of a lancet magazine according to the invention in which a side wall has been removed to enable a view of the interior of the magazine and the

lancets contained therein (partial figure A), schematic side and front-views of those parts of a preferred lancet dispenser and of a corresponding lancing device (partial figure B) which interact with one another to remove the lancet, as well as a top-view (partial figure C) and a side-view (partial figure D) of a preferred embodiment of a lancet which can be accommodated in the lancet magazine according to figure 4A.

Figure 5 shows schematically how lancets can be removed from the lancet magazine according to figure 4 using a lancing device on the basis of ten partial figures (A to K).

Figure 6 shows schematically on the basis of four partial figures (A to D) a further preferred embodiment of a lancet magazine in a top-view (A) and from the front (B) as well as a suitable set of lancets for this lancet magazine that are detachably connected together also in top-view (C) and from the front (D). In this connection the views from the front (B,D) are partially cut out in order to illustrate details of the construction.

Figure 7 shows schematically on the basis of six partial figures (A to F) how lancets can be removed from a lancet magazine according to figure 6 using a pricking device.

The numbers in the figures denote:

- 1 lancet magazine
- 2 lancet
- 3 housing

4 removal site
5,5' transport device
6 operating knob for the transport device 5
7 guide groove for the transport device 5
8 stop
9 opening to insert the lancing device 15
10 opening to eject the protective sheath 14
11 metal needle
12 lancet body
13 pin
14 protective sheath
15 lancing device
16 grip body
17 tip
18 protective cap
19 lancet holder
20 flexible holding tongue with barbs
21 ejector
22 funnel-shaped notch in the lancet body 12
23 V-shaped recess in the lancet body 12
24 projection on the protective sheath 14
25 plate
26 spiral spring
27 movable housing member
28 gripper system
29 guide pin
30 guide groove
31 lancet 2 in the preliminary removal position
32 holding device
33 lancet 2 in the final removal position
34 viewing window
35 set of lancets
36 plastic disk
37 insertion socket
38 flexible tongue

A diagram of a side-view of a particularly preferred embodiment of a lancet magazine (1) is shown in figure 1 in which a side wall of the housing (3) has been removed to enable a view into the lancet magazine (1) and of the lancets (2) contained therein. The lancet magazine (1) has essentially an elongate, flat cuboid shape in which the lancets (2) are arranged linearly next to one another each in pair-wise contact. The lancets can be manually pushed to the removal site (4) with the aid of a transport device (5) for which an operating knob (6) for the transport device (5) is provided on the outside of a long, narrow side of the lancet magazine (1). The transport device (5) can be moved continuously or discontinuously, for example with stops, with the aid of the operating knob (6). The position of the operating knob (6) allows the actual filling level of the magazine (1) to be displayed.

A guide groove (7) is contained within the lancet magazine (1) in which the transport device (5) and the protective sheath (14) of the lancets (2) are guided. The protective sheaths (14), the transport device (5) and the guide groove (7) are appropriately matched in size and shape.

A stop (8) is also located in the interior of the housing (3) of the lancet magazine (1) which, together with the pin (13) of the lancet body (12) ensures that a lancet that is in the removal position (4) cannot be pushed out of the opening (10) of the lancet magazine (1) when a lancing device is inserted through the opening (9).

The guide groove (7) and the stop (8) can also be contained in the side surface of the housing (3) facing the inner side of the lancet magazine (1) which was removed in figure 1 to enable a view into the lancet magazine.

A lancet (2) is shown in figure 2 which can be accommodated in a lancet magazine (1) according to figure 1. Whereas the lancet (2) in figure 1 is shown schematically in a side-view, a schematic top-view of a lancet (2) is shown in figure 2. The lancet (2) is composed essentially of a metal needle (11) with a tip that is surrounded by a protective sheath (14). This protective sheath (14) must be removed from the lancet (2) before the lancet (2) is used to draw blood. The lancet (2) additionally contains on that side which is opposite to the protective sheath (14), a lancet body (12) which contains a pin (13) on both sides. This, together with the stop (8) in the housing (3) of the lancet magazine (1), ensures that a lancet (2) located at the removal site (4) cannot be pushed out of the lancet magazine (1) when a lancing device is inserted. The lancet body (12) and the protective sheath (14) are preferably manufactured from an injection-mouldable plastic.

Figure 3 shows schematically on the basis of 7 partial figures (A to G) how a lancet (2) which is at the removal position (4) of a lancet magazine (1) is removed from the lancet magazine (1) with the aid of a lancing device (15). The lancing device (15) essentially has a fountain-pen shape. Its essential components are a grip body (16), a tip (17) and a protective cap (18). The movable mechanical components of the lancing device (15) that are required for the lancing movement are

accommodated in the grip body (16). These substantially correspond to the prior art, for example EP A-0565 970 and are not intended to be elucidated in more detail here. The lancet holder (19) is accommodated in the tip (17) which is exposed when the protective cap (18) is pulled off or unscrewed from the lancing device (15). Essential features of the lancet holder (19) of the present particularly preferred embodiment of a lancing device (15) are the flexible holding tongue (20) with a barb and the ejector (21) since these components of the lancet holder (19) interact directly with the lancet (2) in the lancet magazine (1).

After the protecting cap (18) has been removed from the lancing device (15), the tip (17) of the lancing device is exposed (figure 3A). The lancing device (15) is moved with its tip (17) first towards the lancet magazine (1) in which a lancet (2) is located at the removal position (4) (figure 3B). The tip (17) of the lancing device (15) has a recess which enables the tip (17) to be pushed over the lancet magazine (1). As a result the lancet holder (19) is inserted through the opening (9) into the lancet magazine. In this process the flexible holding tongue (20) glides over the lancet (2) located at the removal position (4) which slightly bends the holding tongue (20) upwards (figure 3C). As the lancet holder (19) is further inserted into the lancet magazine (1), the lancet is pushed by the ejector (20a) towards the opening (10) until the pin (13) of the lancet body (12) rests on the stop (8) thus preventing further displacement of the lancet (2) (figure 3D). When the lancet holder (19) is pushed further into the lancet magazine (1), the ejector (20a) no longer pushes the whole lancet (2) but only the protective sheath (14) towards the opening (10). When the lancet holder (19) is

completely inserted into the lancet magazine (1), the ejector (20a) separates the protective sheath (14) from the lancet tip and the protective sheath falls out of the opening (10). At the same time the barb of the flexible holding tongue (20) grips in front of the lancet body (12) and thus holds the lancet (2) in the lancet holder (19) (figure 3E). When the lancing device (15) is removed from the lancet magazine (1), the lancet (2) which is located in the lancet holder (19) is also removed from the magazine (1). This makes room at the removal position (4) for a lancet (2) to be advanced which can be manually pushed to the removal position (4) with the aid of the transport device (5) (figure 3F). After the process of removing the lancet (2) from the lancet magazine (1), the lancing device (15) must be sealed with the protecting cap (18). In this process the lancing device (15) can be automatically tensioned by rotation of the protecting cap (18). It is thus available for collecting blood.

Figure 4A shows a further particularly preferred embodiment of the lancet magazine (1) according to the invention in a side-view in which the lancet magazine (1) is shown partially in section. The lancet magazine (1) has essentially an elongate flat cuboid shape. Like the embodiment of figure 1, the lancets (2) in this case are also arranged essentially linearly next to one another and in pair-wise contact. The lancets (2) are transported automatically towards the removal position (4) by a transport device (5) which is essentially composed of a plate (25) and two spiral springs (26) which drive this plate (25). A second transport device (5') is provided in the region of the removal position (4). This is essentially composed of a movable housing member (27) which is held in the resting position shown

by a spiral spring (26). In the region of the transport device (5') there are also the openings (9) for inserting the lancing device as well as the opening (10) to eject the protective sheath (14) of the lancet (2) which also makes use of the flexible tongue (38) which is movably attached to the housing (3) of the lancet magazine (1). A further component of the transport device (5') is a gripper system (28) which grips the top lancet (2), i.e. the lancet that is nearest to the removal position (4), when the transport device (5') is operated.

Detailed drawings of schematic views of the lancing device (15) in a side and front view as well as those parts of the lancet magazine (1) into which the lancing device (15) can be inserted to remove a lancet (2) are shown in figure 4B. Only that part of the lancing device (15) which is relevant to the invention is shown at the top left of figure 4B like the lancing device (15) from figure 3A. Also in this case the other functional components correspond to the prior art. The lancing device (15) comprises a grip body (16) and a tip (17) in which a lancet holder (19) is housed which in turn has a flexible holding tongue (20). The side-view of these components of the lancing device (15) are shown in a partial section in figure 4B. A top-view from the front of the lancing device (15) is shown on the right-hand side next to the side-view in figure 4B. The top-view illustrates the relative position of the aforementioned components. In addition the guide groove (30) is shown that is provided in the tip of the lancing device (17).

A frontal detailed view of the opening (9) of the lancet magazine (1) is shown in figure 4B below this frontal view of the lancing device (15). On the right is a side-

view of the lancet magazine (1) in a partial section. The gripper system (28) and the guide pin (29) are shown in particular in the frontal view of the opening (9) of the lancet magazine (1). The gripper system (28) is composed of two movable tongues provided with barbs which, when the movable housing member (27) is pressed down, surround and hold a lancet held in the preliminary removal position (31) by a holding device (32) which protrudes sideways as a hemispherical projection from the inner surface of the housing wall of the lancet magazine (1) so that when the spiral spring (26) relaxes this causes the movable housing member (27) to glide back into the starting position taking a lancet (2) into the final removal position (33). In this process the flexible tongue (38) is pressed outwards whereupon it moves back into its resting position which is slightly inclined inwards. When the lancing device (15) is inserted into the opening (9) the guide pin (29) moves in the guide groove (30) in the tip (17) of the lancing device (15). This ensures that the lancing device (15) is inserted in the correct orientation into the opening (9). Furthermore a suitable geometry of the guide groove (30) enables the lancing device (15) to turn around its longitudinal axis when it is inserted through the opening (9) into the lancet magazine (1). In this manner the lancet (2) that is located in the removal position (33) is also rotated around its longitudinal axis. As a result the protective sheath (14) of the lancet (2) as shown in figure 4C and D can be twisted off from the remainder of the lancet (2) to expose the metal needle (11) or its point.

The particularly preferred embodiment of the lancet (2) shown in figure 4C and D is essentially composed of a metal needle (11) which in this case is almost

completely surrounded by a plastic body (12). In this case the protective sheath (14) is a component of the plastic body (12) and there is a predetermined breaking point at the site of connection between the protective sheath (14) and the remaining plastic body (12) which allows the protective sheath (14) to be separated when the protective sheath (14) is rotated relative to the plastic body (12). There is a projection (24) on each of the two sides of the protective sheath (14) which serve to detachably connect several lancets (2) to form a set of lancets. In the present preferred embodiment, the lancets (2) are connected together - like staples - by spots of glue on the projections (24).

Means (22, 23) are provided in the lancet body (12) which can engage in parts of the lancet holder (19) in order to hold the lancet (2) firmly in the lancet holder (19). The lancet body (12) in the particularly preferred embodiment of the lancet (2) that is shown, contains a funnel-shaped notch (22) and a pair of opposing V-shaped recesses (23). The barb of the removable tongue (20) of the lancet holder (19) of the lancing device (15) can engage in the funnel-shaped notch (22) and thus hold the lancet (2). The V-shaped recesses (23) can be used with alternative embodiments of the lancet holder (19) of a lancing device (15) that are not shown here.

The lancet magazine (1) of the embodiment shown in figure 4 can be opened by the user in order to insert a new set of lancets. The housing of the lancet magazine (1) can be opened by folding back the transport device (5'). The lancets (2) are inserted into the magazine (1) individually or detachably connected as a set of lancets. In this process the transport device (5) is tensioned again by pressing together the spiral springs

(26). Finally the transport device (5') is folded back. The magazine (1) is then ready for use.

In figure 5 ten partial figures (A to K) show - like figure 3 - how a lancet (2) can be removed from a lancet magazine (1) which corresponds to the particularly preferred embodiment of figure 4A with the aid of a lancing device (15):

Before the lancet is removed the protecting cap (18) must be pulled or twisted off the lancing device (15) so that the tip (17) of the lancing device is exposed (figure 5A). The lancet which is located in the preliminary removal position (31) and is held there by the holding device (32) is gripped by pressing on the movable housing member (27) of the lancet magazine (1), (figure 5B) and is moved into its final removal position (33) when the movable housing member (27) slides back into its original position and the movable tongue (38) is bent outwards where it is held by the gripper system (28). The other lancets in the lancet magazine (1) are pushed forwards by the automatic transport device (5) (cf. figure 4A) so that there is again a lancet in the preliminary removal position (31) (figure 5C). When the lancing device (15) is inserted into the opening (9) of the lancet magazine (1), the lancet holder (19) grips the lancet (2) located in the final removal position (33) (figure 5D). The interaction between the guide groove (30) in the tip of the lancing device (17) and the guide pin (29) in the opening (9) of the housing (3) of the lancet magazine (1) rotates the lancing device (15) around its longitudinal axis when its tip is completely inserted. Since the lancet (2) is already substantially within the lancet holder (19) during the rotation, the lancet (2) is also rotated around its

longitudinal axis. The protective sheath (14) is excluded from this rotation since its position is fixed by the gripper system (28) and the flexible tongue (38) and thus cannot rotate. The lancet body (12) is twisted against the protective sheath (14) which breaks the predetermined breaking point between the lancet body (12) and protective sheath (14) (figure 5E). When the lancing device (15) is pulled out of the lancet magazine (1), the gripped lancet (2) is also pulled out. In this process the protective sheath (14) is separated from the remainder of the lancet (2) and at first remains in the gripper system (28) (figure 5F). The point of the metal needle (11) and parts of the lancet body (12) protrude from the tip (17) of the lancing device (15) in this particularly preferred embodiment. Attachment of the protecting cap (18) covers the exposed point of the metal needle (11) (figure 5G). Optionally the lancing device (15) can be tensioned at the same time for example by rotating the protecting cap (18).

The protective sheath (14) of the lancet (2) which remains in the gripper system (28) is pushed out of the gripper system (28) by the movable tongue (38) when the movable housing member (27) is pressed down again to remove a further lancet (2) from its preliminary removal position (31) (figure 5H) and firstly lies loosely on the next lancet (2) to be transported into the final removal position (figure 5I) from which it can be easily removed (figure 5K).

A further particularly preferred embodiment of the lancet magazine (1) (A, B) and a set of lancets (35) that is suitable for it (C, D) is shown in figure 6. The lancet magazine (1) of this preferred embodiment has essentially a flat round disk shape on which a socket

(37) is mounted through which a lancing device can be inserted via the opening (9) into the lancet magazine (1) to remove lancets (2). A transparent inspection window (34) is provided on one of the circular sides of the lancet magazine (1) which allows a control of the degree to which the lancet magazine (1) is filled with lancets. The inspection window (34) can be composed of a transparent plastic joined to the housing (3). However, it is also possible that the entire housing (3) is manufactured from a transparent plastic. Alternatively the inspection window (34) can be merely designed as a cut out of the housing (3) which is left open. The transport device (5) can be operated by an operating knob (6) which for example brings lancets into the removal position (3) by means of a spiral spring. A guide pin (29) can in turn be provided in the inside of the opening (9) of the socket (37) which can interact with the guide groove in the lancing device.

A top-view and a view of the front of a set of lancets (35) is shown in figures 6C and D the front view being partially in cross-section. The set of lancets (35) is composed of a plurality of lancets (2) that are arranged radially around a circular central plastic disk (36). The points of the metal needles (11) of the lancets (2) are inserted in the central plastic disk (36). The lancets themselves correspond essentially to the lancets that are shown in figure 4C. Also in this case V-shaped recesses (23) are provided in the lancet body (12) which enable an interaction with the lancet holder to a lancing device.

The lancet magazine (1) of the preferred embodiment shown in figures 6A and B can be opened by the user in order to insert a new set of lancets (35). The housing

of the lancet magazine (1) can be opened by removing the upper half of the housing i.e. the half provided with an inspection window. The lancets (2) are inserted as a set of lancets (35). The spiral spring of the transport device (5) is tensioned by twisting the inserted set of lancets (35) about its central axis. Finally the removed half of the housing is again attached to the magazine (1) for example by clipping on. The magazine (1) is thus ready to use.

In figure 7 six partial figures (A to F) show - like figure 3 and figure 5 - how a lancing device (15) can be used to remove lancets (2) from the particularly preferred lancet magazine (1) of figure 6:

After the protecting cap (18) has been removed from the lancing device (15), the tip (17) with the guide groove (30) and the lancet holder (19) of the lancing device (15) are exposed (figure 7A). The lancing device (15) can now be inserted into the opening (9) of the socket (37) of the lancet magazine (1). In this process the guide groove (30) in the tip (17) of the lancing device (15) interacting with the guide pin (29) in the opening (9) of the lancet magazine (1) ensures an unequivocal orientation of the lancing device (15) relative to the lancet magazine (1). As soon as the tip (17) of the lancing device (15) has been completely inserted into the lancet magazine (1), the lancet (2) which is in the removal position is gripped by the lancet holder (19) (figure 7B and C). Rotation of the lancing device (15) which is effected by the contour of the guide groove (30), rotates the lancet (2) together with the lancing device (15) around its longitudinal axis. In this process the point of the metal needle (11) is turned in the plastic disk (36) and is thus detached (figure 7D).

When the lancing device (15) is removed from the lancet magazine (1), the lancet (2) is held by the lancet holder (19) in the lancing device (15) (figure 7E). The point of the metal needle (11) as well as the point of the metal needle (11) on the nearest part of the lancet body (12) protrude in this particularly preferred embodiment from the lancet holder (19) of the lancing device (15). In order to tension the lancing device (15), the protecting cap must again be pushed over the tip (17) with the lancet holder (19) of the lancing device (15) and turned relative to the grip body (16).

660000 3463560

C l a i m s

1. System that is suitable for collecting a body fluid from a region of the body of a person to be examined comprising:
a lancing device (15) which is suitable for holding a lancet (2),
a lancet magazine for storing two or several lancets (2) which has a transport device (5) for the lancets (2) and has an opening (9) into which the lancing device (15) can be inserted to remove an individual lancet (2) from the lancet magazine (1), and
two or several lancets (2).
2. System as claimed in claim 1, wherein the lancet magazine has an elongate, flat cuboid shape.
3. System as claimed in claim 2, wherein the lancets are arranged next to one another in pair-wise contact in the lancet magazine.
4. System as claimed in claim 2 or 3, wherein a second opening through which protective sheaths of the lancet needles can be ejected is located in the lancet magazine in addition to the opening into which the lancing device can be inserted to remove a single lancet from the lancet magazine.
5. System as claimed in claim 1, wherein the lancet magazine has a flat angular or round disk shape.

6. System as claimed in claim 5, wherein the lancets are arranged radially in one plane about a central axis.
7. System as claimed in one of the claims 1 to 6, wherein the transport device of the lancet magazine is a manually operated slide.
8. System as claimed in one of the claims 1 to 6, wherein the transport device of the lancet magazine is driven by a spring mechanism.
9. System as claimed in one of the claims 1 to 8, wherein a pin is present in the opening of the lancet magazine into which the lancing device can be inserted to remove a single lancet from the lancet magazine, and the pin engages in a guide groove in the tip of the lancing device which is inserted into the said opening and thus causes a rotation of the lancing device or a part of the lancing device about its longitudinal axis.
10. System as claimed in one of the claims 1 to 8, wherein a guide groove is present in the opening of the lancet magazine into which the lancing device can be inserted to remove a single lancet from the lancet magazine into which a pin in the tip of the lancing device which is inserted into the said opening engages and thus causes a rotation of the lancing device or a part of the lancing device about its longitudinal axis.

11. Lancet magazine for storing 2 or several lancets which is suitable for use in a system as claimed in claims 1 to 10, wherein the lancet magazine has a transport device for the lancets and an opening into which the lancing device can be inserted to remove a single lancet from the lancet magazine.
12. Lancet magazine as claimed in claim 11, wherein a second opening through which the protective sheath of the lancet needle can be ejected is located in the lancet magazine opposite to the opening into which the lancing device can be inserted to remove a lancet from the lancet magazine.
13. Lancet magazine as claimed in claim 11 or 12, wherein a guide groove or a guide pin is present in the opening of the lancet magazine into which the lancing device can be inserted to remove a single lancet from the lancet magazine.
14. Lancet magazine as claimed in one of the claims 11 to 13, wherein the lancet magazine contains means which allow the actual content of lancets to be seen from outside.
15. Lancet containing a metal needle which is partially encased in a metal or plastic body which is suitable for use in a system as claimed in one of the claims 1 to 10, wherein the metal or plastic body contains means which prevent the lancet from being pushed out of the lancet magazine when the lancet is gripped by the lancing device.

16. Set of lancets containing two or several lancets which is suitable for use in a system as claimed in one of the claims 1 to 10, wherein the lancets are detachably connected together.
17. Lancing device with a grip member and a tip that can be covered with a protecting cap which is suitable for use in a system as claimed in one of the claims 1 to 10, wherein a guide groove or a guide pin is present in the tip of the lancing device which is inserted into the lancet magazine to remove a lancet.
18. Method for removing a lancet from a lancet magazine wherein a lancet located in the lancet magazine is manually or automatically transported into a removal position in the interior of the lancet magazine, a lancing device is partially inserted into an opening provided in the lancet magazine, wherein the lancing device when partially inserted automatically grips the lancet located in the removal position and the lancing device with the gripped lancet is removed from the lancet magazine.
19. Method as claimed in claim 18, wherein the protective sheath of the lancet needle is removed from it when the lancing device grips the lancet.
20. Method as claimed in claim 18, wherein the protective sheath of the lancet needle is removed from it when the lancing device with the gripped lancet is removed.

- 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

Abstract

The present invention concerns a system suitable for collecting a body fluid, in particular blood from a body region of a person to be examined comprising a lancing device which is suitable for holding a lancet, a lancet magazine for storing two or several lancets which has a transport device for the lancets and has an opening into which the lancing device can be inserted to remove a lancet from the lancet magazine, and two or several lancets.

The invention in addition concerns a method for removing a lancet from a lancet magazine in which a lancet located in the lancet magazine is manually or automatically transported into a removal position in the interior of the lancet magazine, a lancing device is partially inserted into the opening provided in the lancet magazine in the process of which the lancing device automatically grips the lancet located in the removal position when it is partially inserted and the lancing device with the gripped lancet is removed from the lancet magazine.

FIG. 1

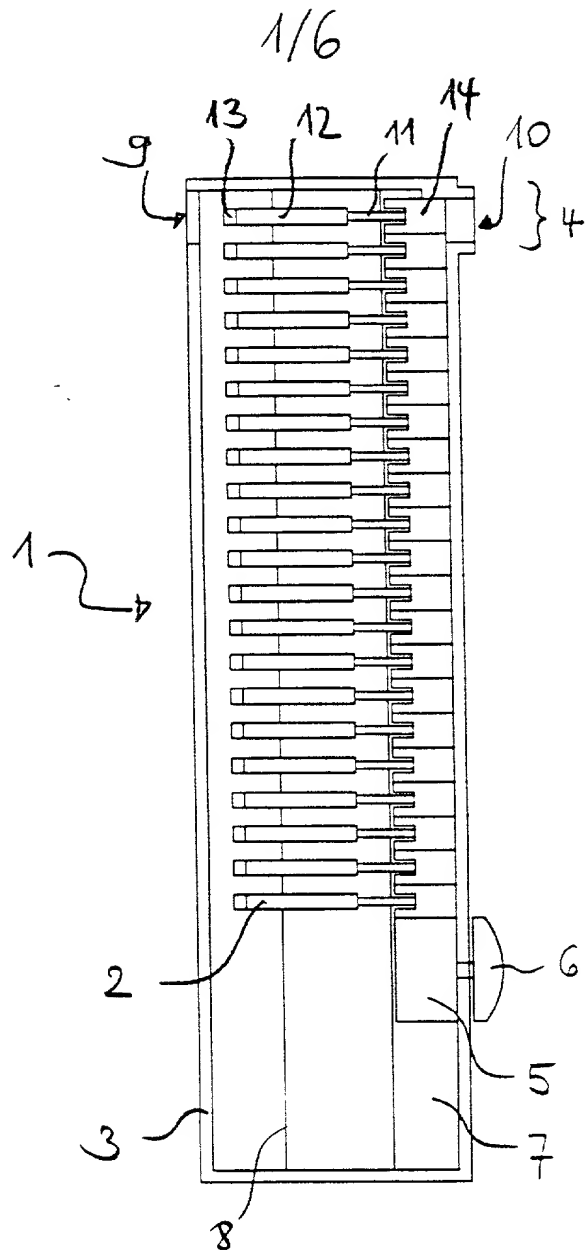


FIG. 2

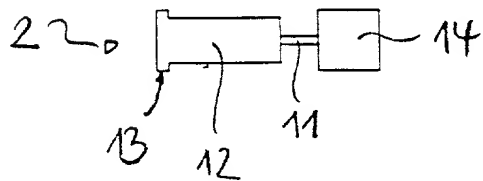


FIG. 3

2/6


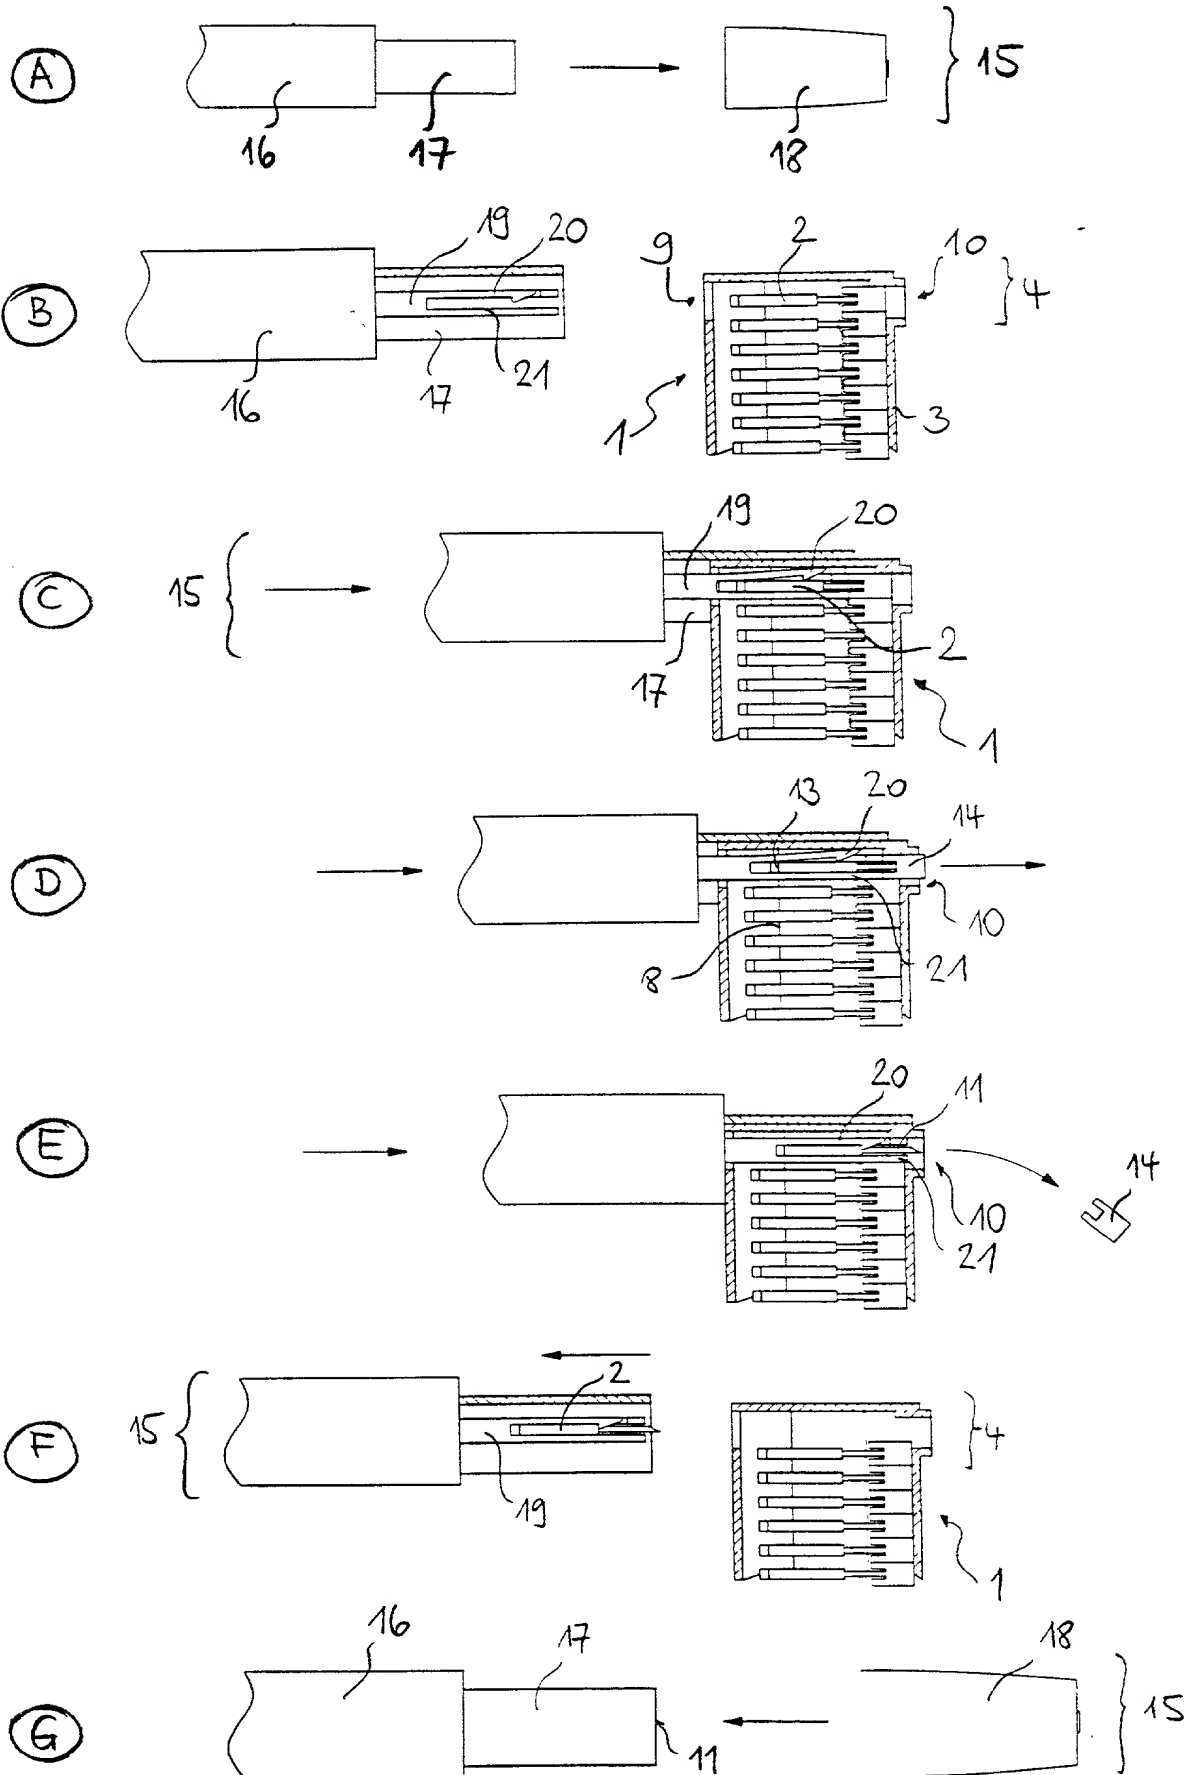


FIG. 4

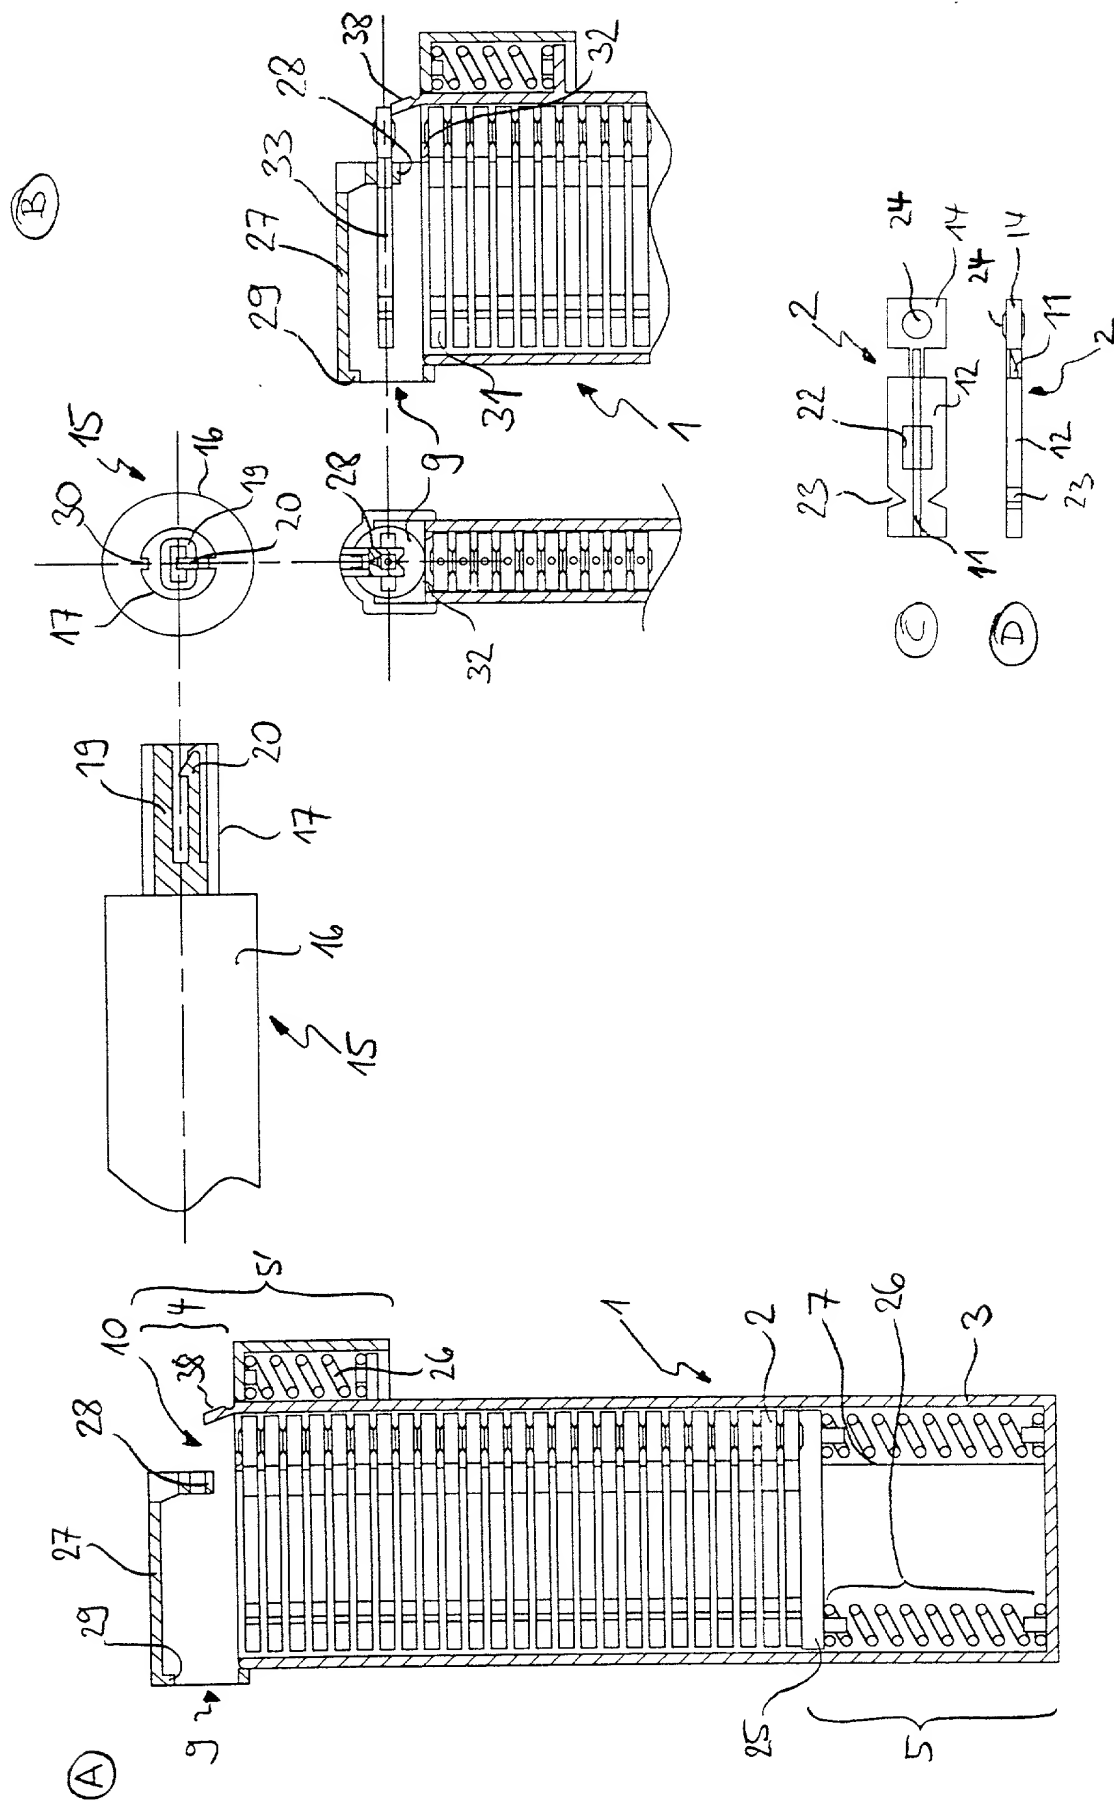

4/6

FIG. 5



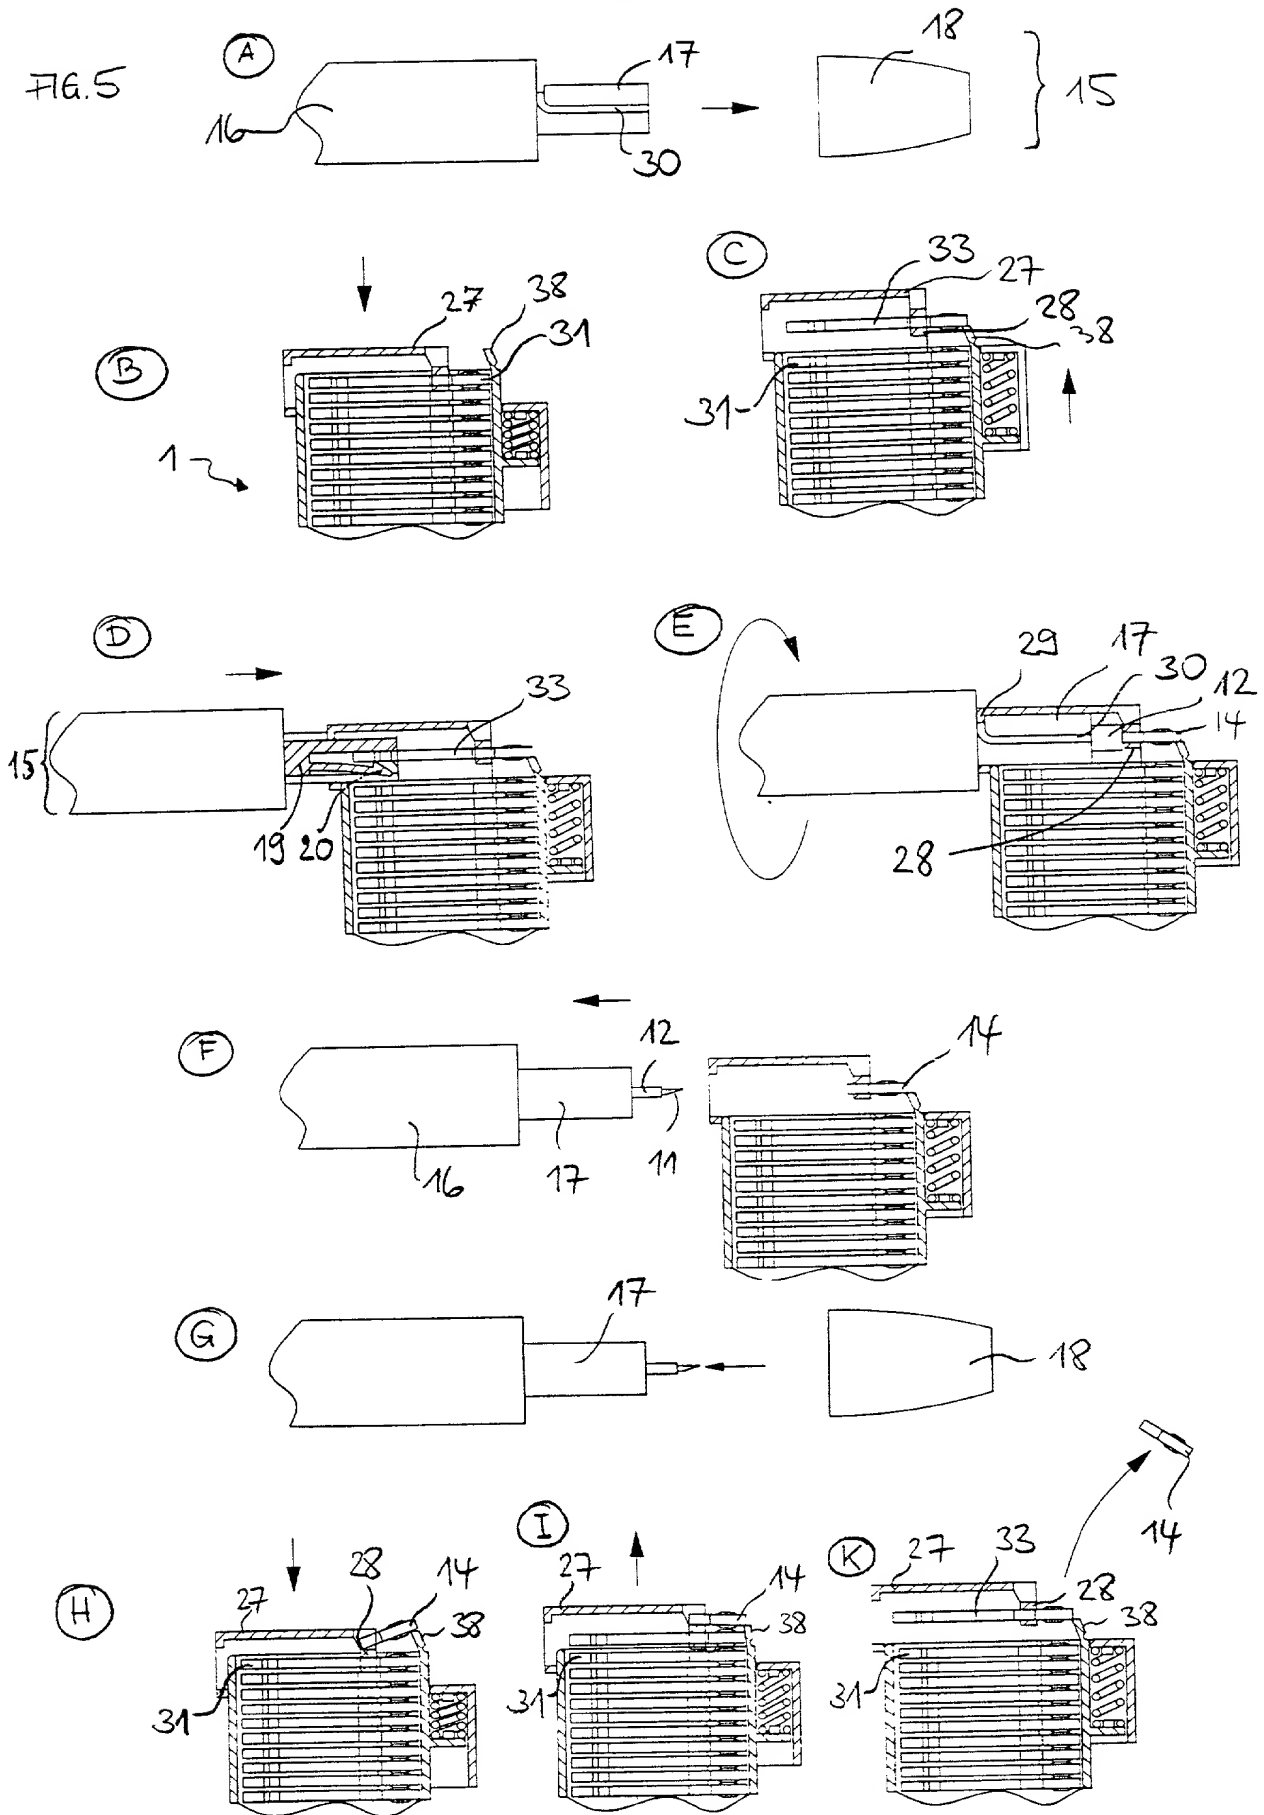


FIG. 6

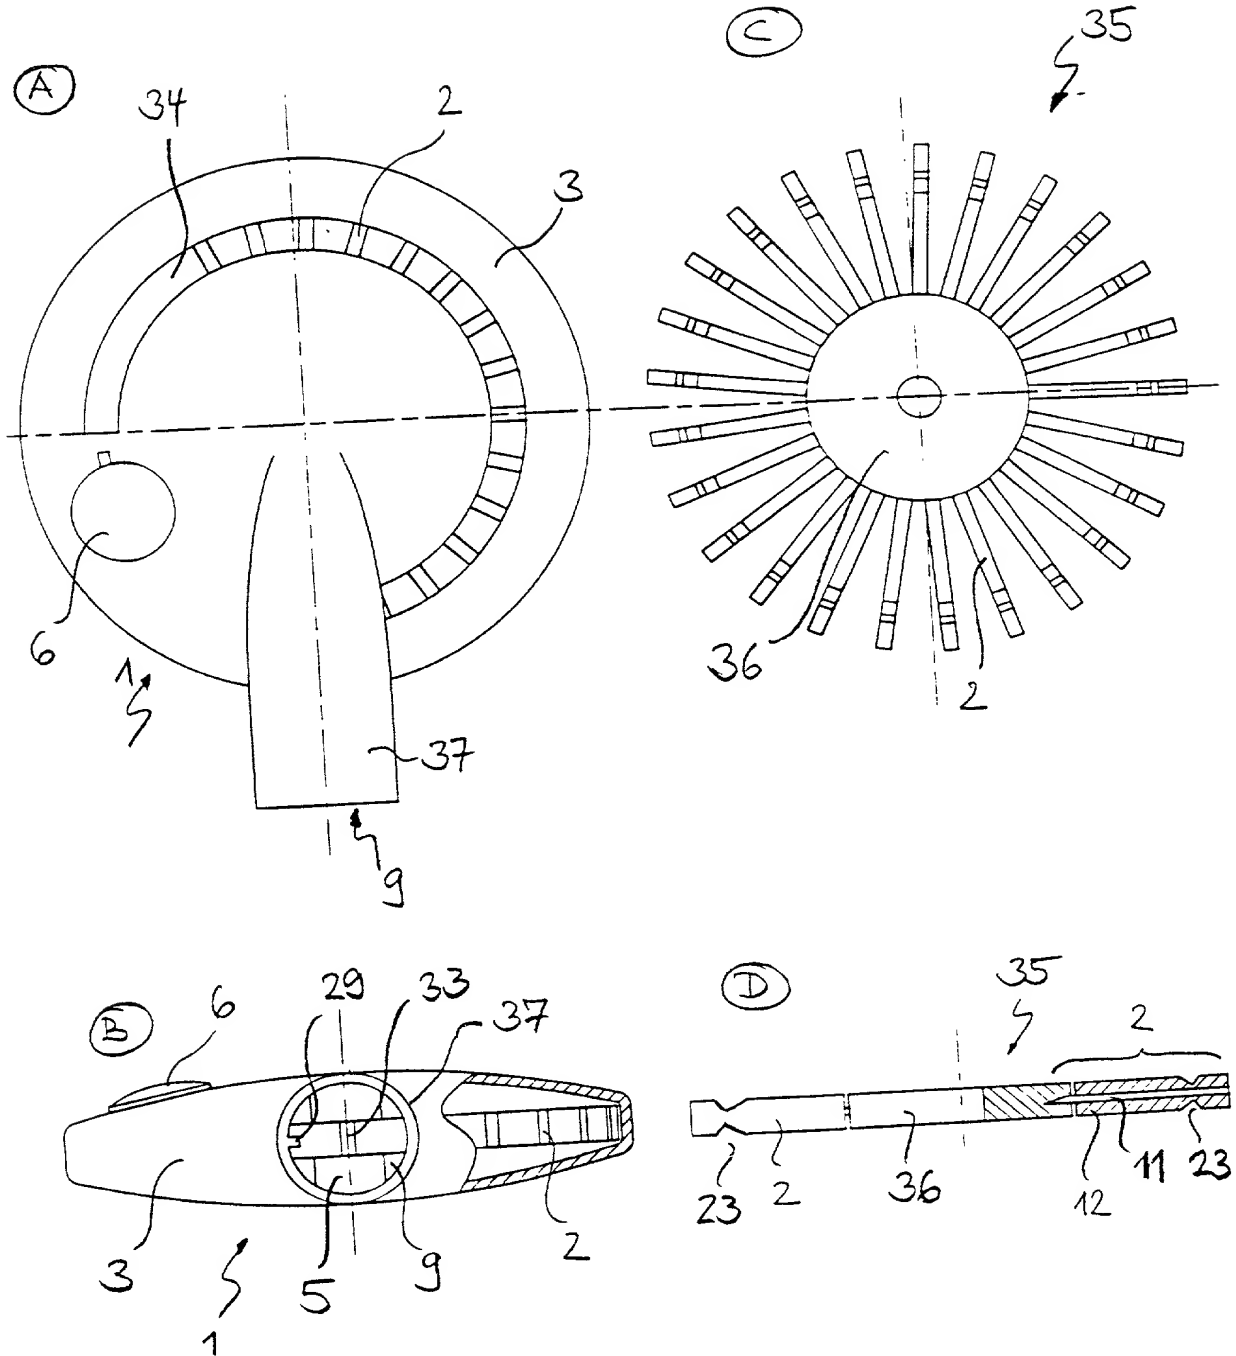

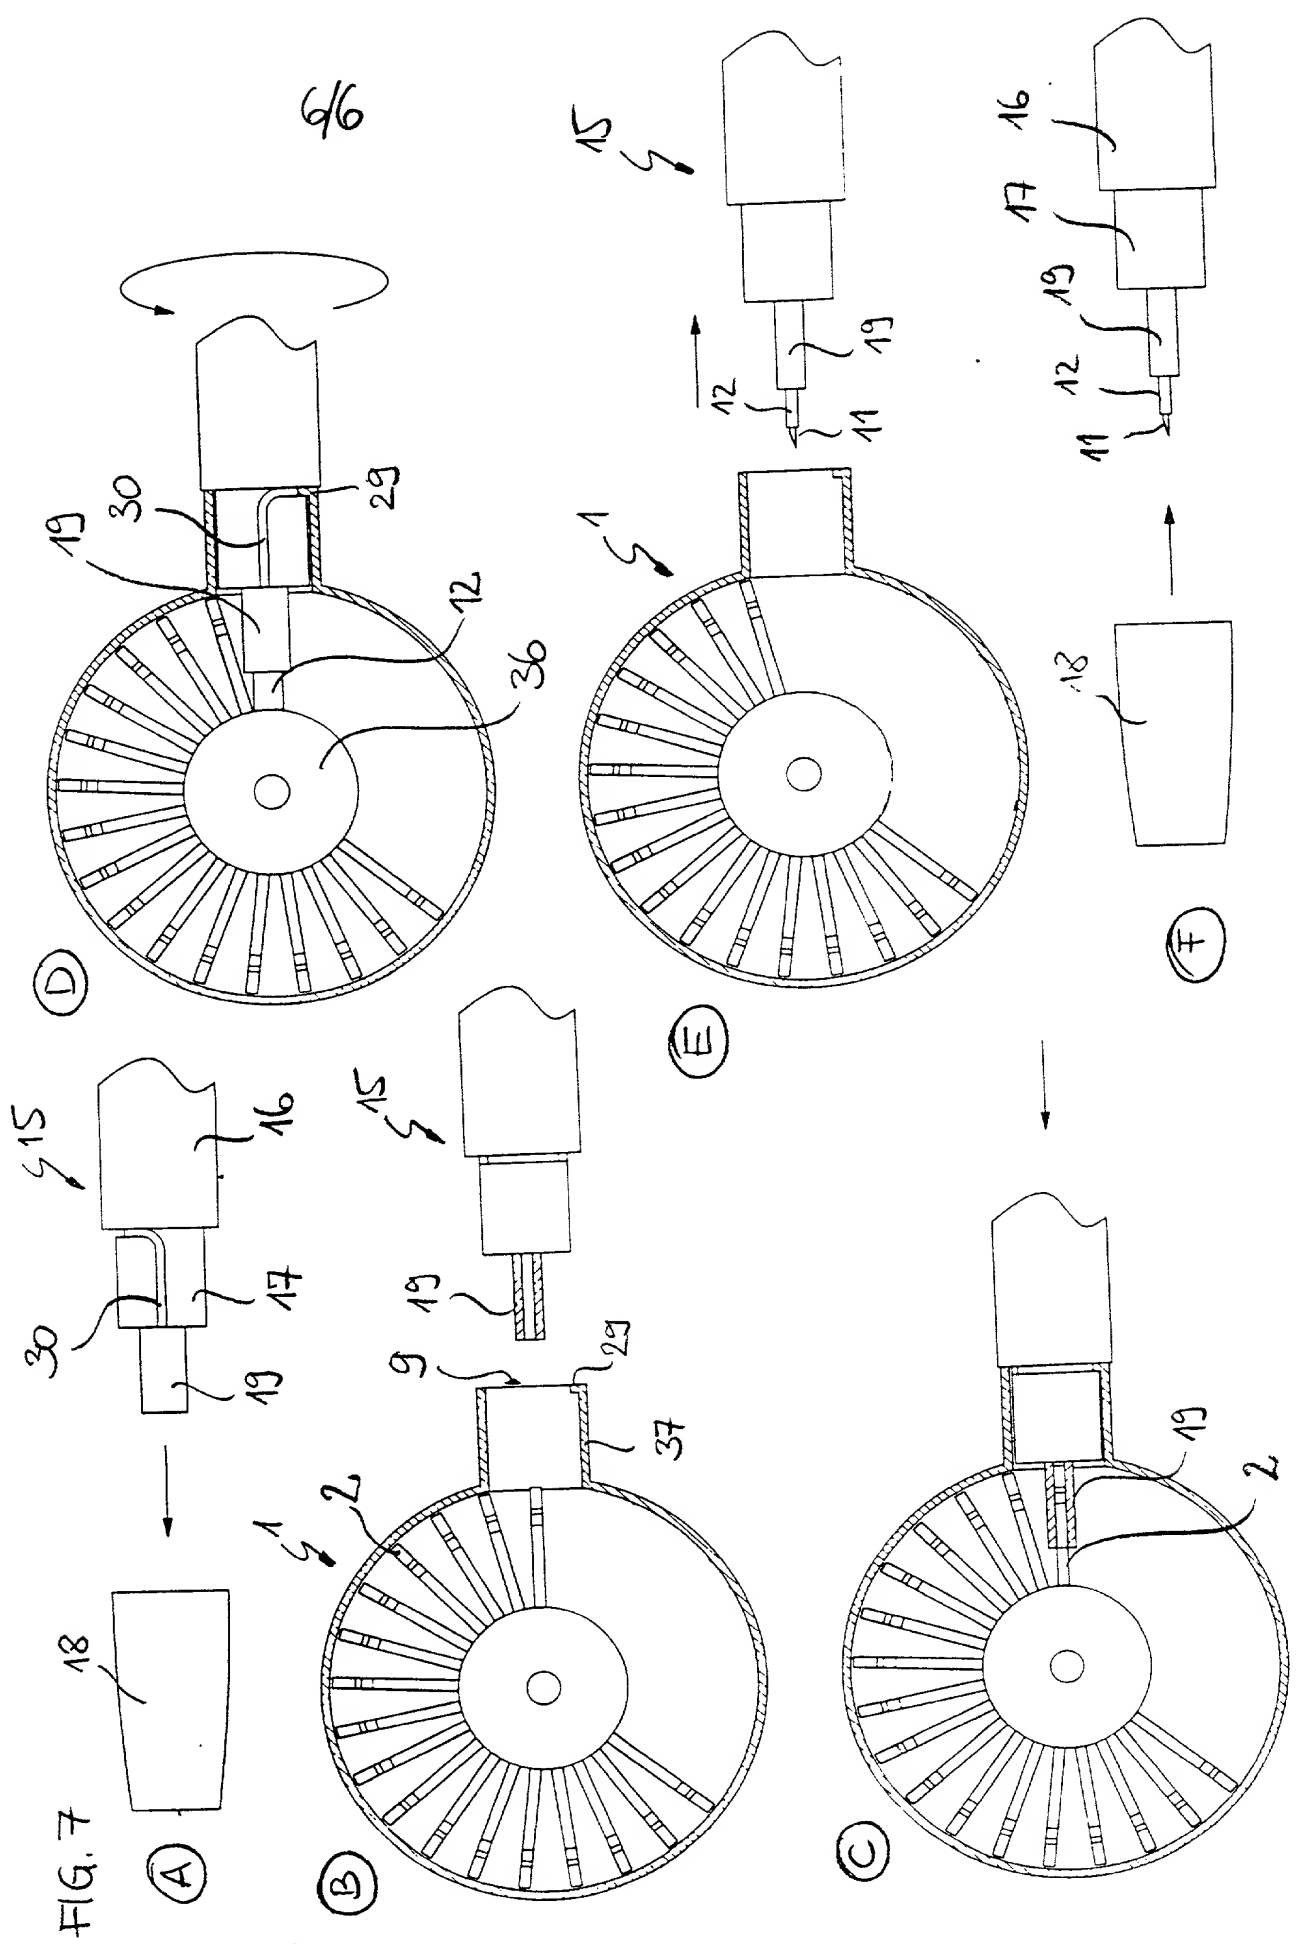

Docket No.

BMID9813US

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LANCET DISPENSER

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

198 40 856.0

(Number)

Germany

(Country)

7 September 1998

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

Richard T. Knauer, Reg. No. 35,575

D. Michael Young, Reg. No. 33,819

Brent A. Harris, Reg. No. 39,215

Jill Lynn Woodburn, Reg. No. 39,874

Marilyn L. Amick, Reg. No. 30,444

Send Correspondence to: **Richard T. Knauer**
Roche Diagnostics Corporation
9115 Hague Road, Bldg. D, P.O. Box 50457
Indianapolis, IN 46250-0457

Direct Telephone Calls to: *(name and telephone number)*
Richard T. Knauer, Telephone (317) 576-7464

Full name of sole or first inventor Hans-Juergen KUHR	
Sole or first inventor's signature	Date
Residence Perreustr. 30, D-68219 Mannheim, Germany	
Citizenship German	
Post Office Address Perreustr. 30	
D-68219 Mannheim, Germany	

Full name of second inventor, if any Hans KINTZIG	
Second inventor's signature	Date
Residence In der Muld 4, D-67311 Tiefenthal, Germany	
Citizenship German	
Post Office Address In der Muld 4	
D-67311 Tiefenthal, Germany	